


Cantilevered Batten Awning

Outrigger Awnings is an Australian Company, and all awnings are designed, engineered, and manufactured in Australia using the best available fabrics and materials



Details


An Outrigger Cantilevered Batten Awning is a lightweight freestanding structure with supporting poles on one side only. The poles are individually fabricated with rigid arms. The poles and arms are typically manufactured from either galvanised steel or aluminium. The awning has curved, pitched or straight battens which stiffen the fabric, eliminate flapping and ensure the awning does not hold water. A cantilevered batten awning is typically a rectangular shape, however it can be manufactured to almost any shape, from either 502 pvc fabric or Outlook woven pvc coated mesh.

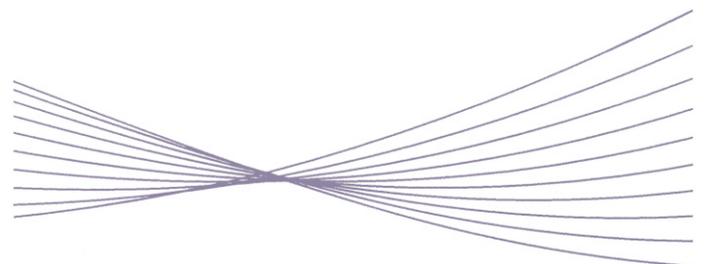

OUTRIGGER


Awning Shapes

CANTILEVERED BATTEN AWNING OPTIONS

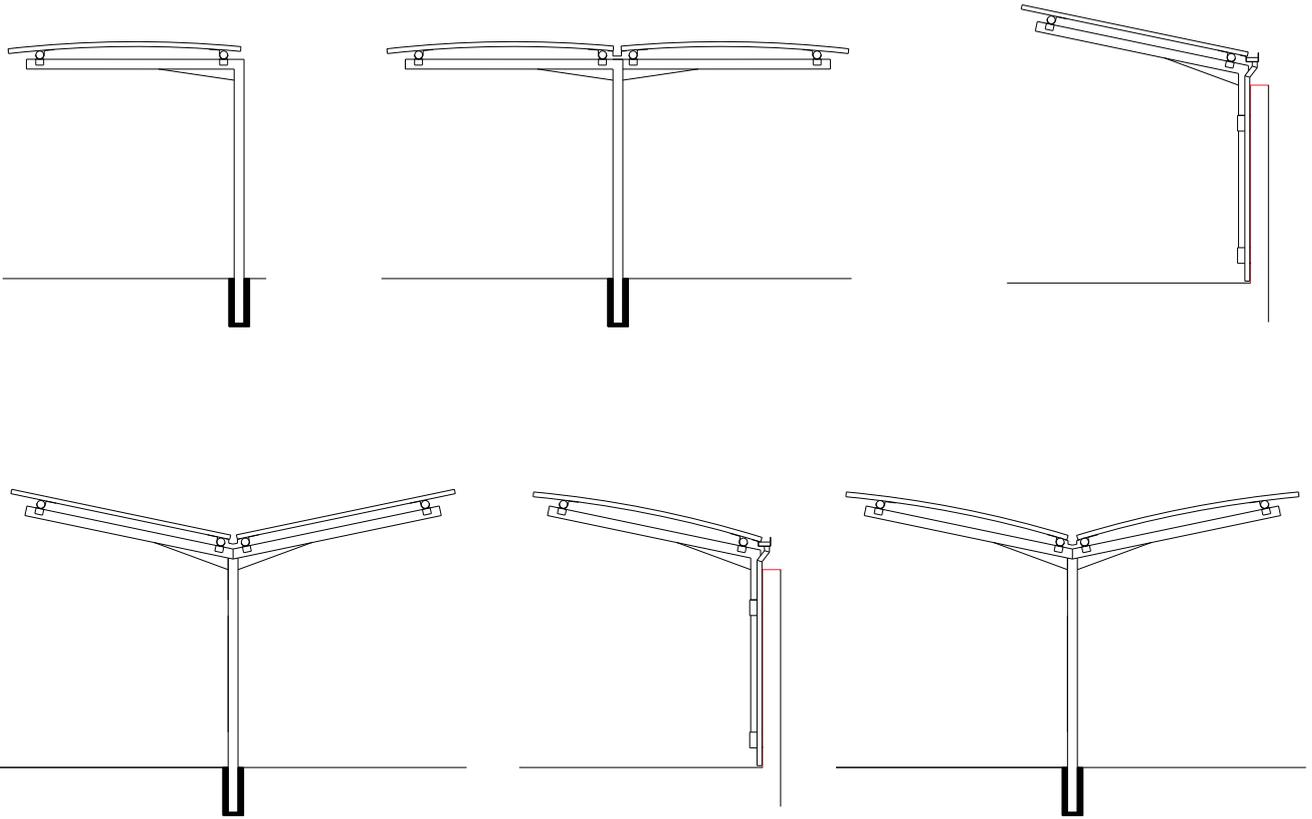


MADE TO ORDER STANDARD SHAPES

SHAPE: CBSW1




SHAPE: CBSW11




MADE TO ORDER CUSTOM SHAPES


SHAPE: CBSW2




SHAPE: CBSW3




SHAPE: CBSW4




SHAPE: CBSW21



SHAPE: CBSW31



SHAPE: CBSW41



Cantilevered Batten Awning Instructions

Outriggers cantilevered batten awning is a demountable fabric structure. The estimated time to take the awning down is 60 minutes. It is envisaged the structure will be left up most of the time and the design is engineered as a Category One structure.


An Outrigger cantilevered batten awning can be left out in high winds and heavy rain.

Outriggers cantilevered awning is designed and constructed in accordance with the Building Code of Australia. The wind loading for a cantilevered awning is calculated using Australian Standard AS 4055-Wind Loads for Housing. Outriggers cantilevered awning is unique in that it is the only cantilevered awning available designed to withstand winds up to 140 km/h.

The awning design is typically freestanding and does not place any wind or pull out load onto adjacent buildings.

Outrigger recommends any one of the following three fabrics for a cantilevered awning. For a rainproof awning we would recommend Ferrari 502 Awning pvc. For installations where maximum shade is required however it is not necessary for the awning to be rainproof, we would recommend Ferrari Soltis92 pvc shade mesh. For installations where maximum shade is required at minimum cost we would recommend Outlook pvc coated yarn.

All three of the recommended fabrics are extremely durable and should give a life in excess of 12 to 20 years. To maintain a clean appearance on light colours the fabric should be pressure cleaned with a wide angle spray nozzle at least once a year. Stubborn stains can be removed with a light detergent. Oil stains may be removed with Dry Cleaning Fluid.

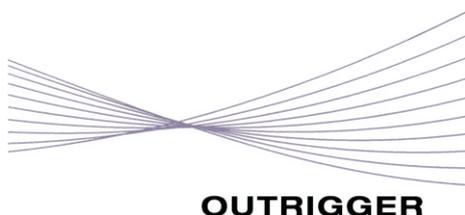

OUTRIGGER AWNINGS
PO Box 7284 Warringah Mall NSW 2100
Phone: (02) 9905 8473 Fax: (02) 9905 8476
Email: info@outriggerawnings.com.au
www.outriggerawnings.com.au
ABN 20 003 718 554